

# ACCESSORIES CHECK & STOP VALVES



## Specification

<b>Fluid</b>	Dry or Lubricated Air
<b>Operating Pressure</b>	-750mm Hg (10 Torr) to 10bar (150psi)
<b>Temperature</b>	0°C to +60°C
<b>Cracking Pressure</b>	0.3bar to 0.5bar (5psi to 7.5psi)

## Design


### Check Valves

Brass Nickel Plated  
Open – Thread to Tube  
Closed – Tube to Thread

### Stop Valves, Self Sealing

Brass Nickel Plated  
Open – Tube to Thread  
Closed – Thread to Tube

## Structure

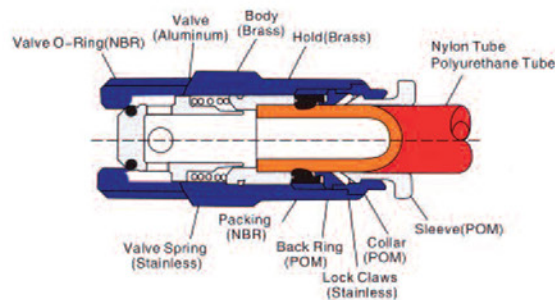

## Symbol

Check Valve



Stop Valve, Self Sealing



## Ordering Codes

### Check Valves

PCVC	04	M5
Model	OD	Thread
Check Valve Tube x BSPT	04 : 4mm	M5 : M5
	06 : 6mm	M6 : M6
	08 : 8mm	01 : 1/8"
	10 : 10mm	02 : 1/4"
	12 : 12mm	03 : 3/8"

PCVF	01	01
Model	Thread	Thread
Male x Female, BSPP	01 : 1/8"	01 : 1/8"
	02 : 1/4"	02 : 1/4"
	03 : 3/8"	03 : 3/8"
	04 : 1/2"	04 : 1/2"

PCFF	01	01
Model	Thread	Thread
Female x Female, BSPT	01 : 1/8"	01 : 1/8"
	02 : 1/4"	02 : 1/4"
	03 : 3/8"	03 : 3/8"
	04 : 1/2"	04 : 1/2"

PCVU	04
Model	OD
Tube x Tube	04 : 4mm
	06 : 6mm
	08 : 8mm
	10 : 10mm
	12 : 12mm

### Stop Valves, Self Sealing

SPC	01	01
Model	OD	Thread
Stop Valve Tube x BSPT	06 : 6mm	02 : 1/4"
	08 : 8mm	03 : 3/8"
	10 : 10mm	04 : 1/2"
	12 : 12mm	

SPU	06
Model	OD
Stop Valve Tube x Tube	06 : 6mm
	08 : 8mm
	10 : 10mm
	12 : 12mm