


# High Torque Stainless Steel:



SECTION 'A'-'A'

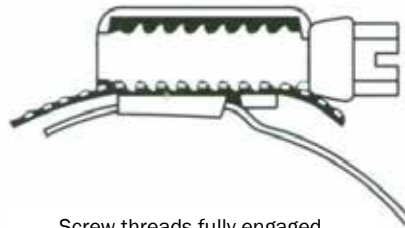

Screw threads fully engaged



Part No.	Adjustment		Band Width mm	Band Thickness mm	Recommended Torque Nm	Maximum Torque Nm	Maximum Pressure Psi	Part No.
	mm	Inches						
JHT35	20- 35	3/4 -13/8	16.0	0.7	11.9	17.0	304.5	JHT35
JHT40	25- 40	1-15/8	16.0	0.7	11.9	17.0	304.5	JHT40
JHT45	25- 45	1-13/4	16.0	0.7	11.9	17.0	304.5	JHT45
JHT50	30- 50	1 1/4-2	16.0	0.7	11.9	17.0	304.5	JHT50
JHT70	40- 70	15/8-23/4	16.0	0.7	11.9	17.0	153.0	JHT70
JHT80	60- 80	23/8-31/8	16.0	0.7	11.9	17.0	153.0	JHT80
JHT95	70- 95	23/4-33/4	16.0	0.7	11.9	17.0	153.0	JHT95
JHT100	80-100	31/8-4	16.0	0.7	11.9	17.0	66.0	JHT100
JHT120	90-120	31/2-43/4	16.0	0.7	11.9	17.0	66.0	JHT120
JHT140	110-140	43/8-51/2	16.0	0.7	11.9	17.0	66.0	JHT140
JHT160	130-160	51/8-61/4	16.0	0.7	11.9	17.0	66.0	JHT160
JHT180	150-180	5 7/8-7	16.0	0.7	11.9	17.0	30.0	JHT180
JHT200	170-200	63/4-77/8	16.0	0.7	11.9	17.0	30.0	JHT200
JHT220	190-220	71/2-85/8	16.0	0.7	11.9	17.0	30.0	JHT220
JHT240	210-240	81/4-91/2	16.0	0.7	11.9	17.0	30.0	JHT240
JHT260	230-260	9-101/4	16.0	0.7	11.9	17.0	30.0	JHT260
JHT280	250-280	97/8-11	16.0	0.7	11.9	17.0	30.0	JHT280
JHT300	270-300	103/8-113/4	16.0	0.7	11.9	17.0	30.0	JHT300
JHT320	290-320	113/8-121/2	16.0	0.7	11.9	17.0	30.0	JHT320
JHT340	310-340	121/4 -133/8	16.0	0.7	11.9	17.0	n/a	JHT340
JHT360	330-360	13-141/8	16.0	0.7	11.9	17.0	n/a	JHT360
JHT380	350-380	133/4-15	16.0	0.7	11.9	17.0	n/a	JHT380
JHT400	370-400	141/2-153/4	16.0	0.7	11.9	17.0	n/a	JHT400
JHT420	390-420	153/8-161/2	16.0	0.7	11.9	17.0	n/a	JHT420
JHT440	410-440	161/8-171/4	16.0	0.7	11.9	17.0	n/a	JHT440
JHT460	430-460	17-181/8	16.0	0.7	11.9	17.0	n/a	JHT460
JHT480	450-480	173/4-187/8	16.0	0.7	11.9	17.0	n/a	JHT480
JHT500	470-500	181/2-195/8	16.0	0.7	11.9	17.0	n/a	JHT500

**Corrosion Resistance:** 400 hours NSS Test

**Fastening:** 8mm A/F screw

**Industry Recommendations:-**



**Quality Assurance:-**



Stainless Steel

**HosesDirect**  
www.hoses.co.uk

www.hoses.co.uk