



# Layflat Hose

## Layflat Delivery Hose

### Blue, 100 Metre Coils

**Applications:** Conveyance and discharge of water etc. Particularly suitable for irrigation and water supply applications. However, can also be used in general industries, civil and construction engineering.

**Pressures:** Values given are based on the short term burst pressure of the hose at 20°C based on a 3:1 safety factor.

This product is only suitable for open ended discharge applications. Pressure ratings are based on discharge pressure from the pump unit.

**Note:** Any increase in temperature above 20°C will result in a decline in working pressure values.


**Chemical Resistance:** Resistant to the oils and greases as above. These hoses are not suitable for use with benzene, petrol, spirits, xylol, toluol or solvents containing aromatics. For more detailed information please contact technical sales.

#### Application

- Irrigation for water, chemical solutions
- Sludge discharge in agriculture, construction, industry, mining and marine servile etc

#### Characteristic

- Coils flat for easy storage
- Shiny hose remains soft & pliable with extremely cold water
- Reinforced with polyester yarn
- Temp: -5°C to + 65°C

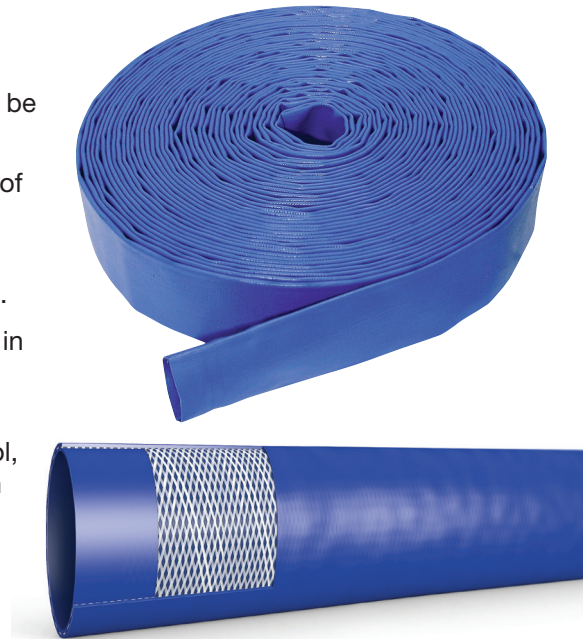

Part No:	SIZE	I.D	FLAT (mm)	W.P BAR	B.P BAR	WEIGHT KG/ROLL	COIL SIZE MM
LFH1-100	1	25	44	4-5	18	15	500x70
LFH114-100	1.1/4	32	51	4-5	18	17	500x75
LFH112-100	1.1/2	38	84	4-5	18	20	520x80
LFH2-100	2	51	91	4-5	18	27	550x100
LFH212-100	2.1/2	64	110	4-5	18	36	560x115
LFH3-100	3	76	133	4-5	18	40	570x130
LFH4-100	4	102	170	4-5	18	60	600x180
LFH6-100	6	150	245	4-5	18	90	700x250
LFH8-100	8	200	320	4-5	18	160	800x350