



Layflat Hose

Layflat Delivery Hose

Yellow, 100 Metre Coils

Applications: Conveyance and discharge of water etc. Particularly suitable for irrigation and water supply applications. However, can also be used in general industries, civil and construction engineering.


Pressures: Values given are based on the short term burst pressure of the hose at 20°C based on a 3:1 safety factor.

This product is only suitable for open ended discharge applications. Pressure ratings are based on discharge pressure from the pump unit.

Note: Any increase in temperature above 20°C will result in a decline in working pressure values.

Chemical Resistance: Resistant to the oils and greases as above. These hoses are not suitable for use with benzene, petrol, spirits, xylol, toluol or solvents containing aromatics. For more detailed information please contact technical sales.

 **Temperature Range:**
-15°C to +55°C

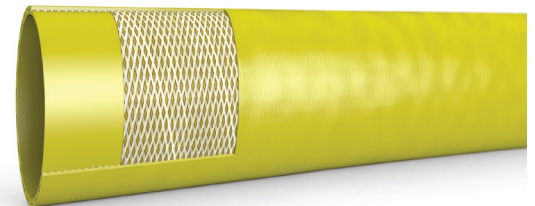

Part No:	INCH	I.Dmm	O.Dmm	LENGTH M	W.P BAR	B.P BAR	WEIGHT
YLH-1	1	25	26.3	100	5-6	18	17
YLH-114	1.1/4	32	33.5	100	5-6	18	19
YLH-112	1.1/2	38	39.4	100	5-6	18	22
YLH-2	2"	51	52.4	100	5-6	18	30
YLH-3	3	76	78.1	100	5-6	18	45
YLH-4	4	102	103.9	100	5-6	18	68
YLH-5	5	127	129.1	100	5-6	18	108
YLH-6	6	152	154.2	100	5-6	18	130
YLH-8	8	203	205.4	100	5-6	18	230