

Polyurethane Anti-spatter Tube



Features:

- Highly abrasion-resistant alloy jacket
- Smooth, non-marking pin-pricked cover
- Smooth, non-marking pin-pricked cover
- Good fitting retention at elevated temperatures
- Lighter than rubber hoses and easy to substitute
- Silicon-free


Material of Inner tubing: Polyurethane

Material of jacketing: Special formulated
flame retardant cover

Temp. Range: -20oF ~ +60oF (-20oC ~ +140oC)

Working Pressure: 3 to 1 safety factor

 **Temperature Range:**
-40°C to +70°C

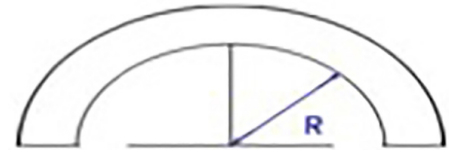

Part No:	D1mm	D2mm	Working Pressure BAR	R mm	Temp,
SC60404MBU	6	4	11	20	-40 to + 70
SC80504MBU	8	5	13	30	-40 to + 70
SC10654MBU	10	6.5	11	35	-40 to + 70