

# Series MD 3/2-way isolation valves

## Series MD modular FRL units



Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm  
Modular

Manual, electro-pneumatic, servo-pilot and pneumatic control



- » Standard tamperproof lock-out (manual valve)
- » 24 V, 110 V or 230 V coils (see the section 2.2.35)
- » Solenoid valve with or without manual override available in different types
- » Additional air intakes with the same characteristics of the inlet air (line)

The Series MD offers multi-sector solutions that ensure saving in terms of installation time, space and costs. Series MD lockable isolation valves allow the inlet and exhaust of compressed air from the plant and can meet several application requirements.

The electric version can be equipped with different options of manual override (Push & Turn, Push-in, retaining lever). Moreover, a version without override is also available. The manually operated valve can be locked thanks to the use of padlocks.

### GENERAL DATA


<b>Construction</b>	modular, compact, spool-type
<b>Materials</b>	see TABLE OF MATERIALS (pag. 3/0.35.02)
<b>Ports</b>	with interchangeable cartridges: 1/8, 1/4 and 3/8 threaded, integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm
<b>Fixing</b>	in-line; wall-mounting by means of through holes in the body or with a support bracket; panel-mounting (for manually operated version only)
<b>Operating temperature</b>	-5°C ÷ 50°C up to 16 bar
<b>Operating pressure</b>	Manual valve: -0,8 bar ÷ 10 bar Electro-pneumatic valve: 2 bar ÷ 10 bar Servopilot or pneumatic valve: -0,8 bar ÷ 10 bar (with pilot 2 ÷ 10 bar)
<b>Nominal flow</b>	see FLOW DIAGRAMS (pag. 3/0.35.03 e 3/0.35.04)
<b>Nominal exhaust flow at 6 bar with Δp = 1 bar</b>	850 NI/min
<b>Fluid</b>	compressed air

**CODING EXAMPLE**


<b>MD</b>	<b>1</b>	<b>-</b>	<b>V</b>	<b>01</b>	<b>-</b>	<b>1/8</b>
-----------	----------	----------	----------	-----------	----------	------------

<b>MD</b>	SERIES					
<b>1</b>	DIMENSION: 1 = 42 mm					
<b>V</b>	3/2-WAY VALVE					
<b>01</b>	DESIGN TYPE: 01 = lockable manual control 16 = electro-pneumatic control, Push & Turn manual override 16IL = electro-pneumatic control, bistable manual override, lever type			16IM = electro-pneumatic control, monostable manual override 16IT = electro-pneumatic control without manual override 36 = pneumatic control		
<b>1/8</b>	PORTS (IN - OUT) *: = without cartridges 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 6 = tube Ø6 8 = tube Ø8 10 = tube Ø10					


\* NOTE: if the inlet (IN) cartridge is different from the outlet (OUT) cartridge, both dimensions shall be indicated.  
Example: MD1-V01-1/4-1/8

**TYPES OF MANUAL OVERRIDE**


Push & Turn manual override

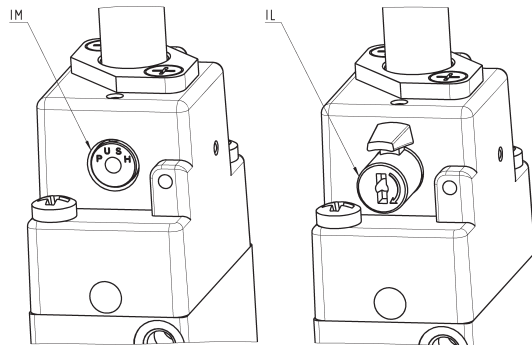

IL = bistable manual override, lever type  
IM = monostable manual override

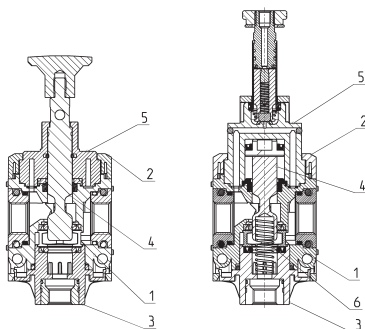
**Series MD lockable isolation 3/2-way valves - materials**


MD...-V01

MD...-V16


PARTS	MATERIALS
<b>1 = Body</b>	Polyamide
<b>2 = Covering</b>	Polyamide
<b>3 = Plug</b>	Polyamide
<b>4 = Spool</b>	Anodized aluminium
<b>5 = End-cover</b>	Polyamide
<b>6 = Lower spring</b>	Stainless steel
<b>Seals</b>	NBR

FLOW DIAGRAMS for manually operated models

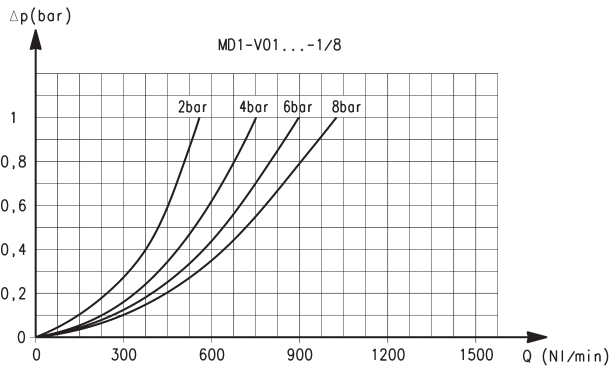

Ports with interchangeable G1/8 threaded cartridges


$\Delta p$  = Pressure drop  
Q = Flow

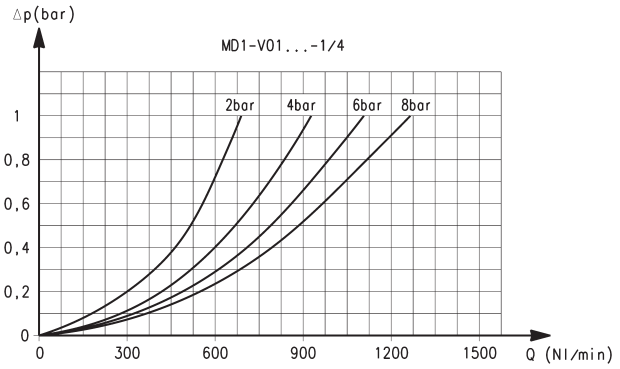

Ports with interchangeable G1/4 threaded cartridges

$\Delta p$  = Pressure drop  
Q = Flow


FLOW DIAGRAM for manually operated models

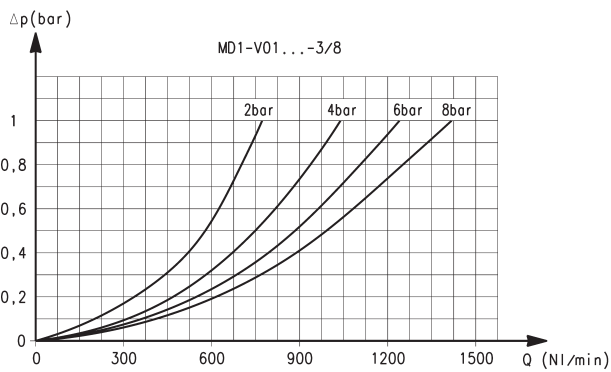

Ports with interchangeable G3/8 threaded cartridges


$\Delta p$  = Pressure drop  
Q = Flow

FLOW DIAGRAMS for electro-pneumatically or pneumatically operated models

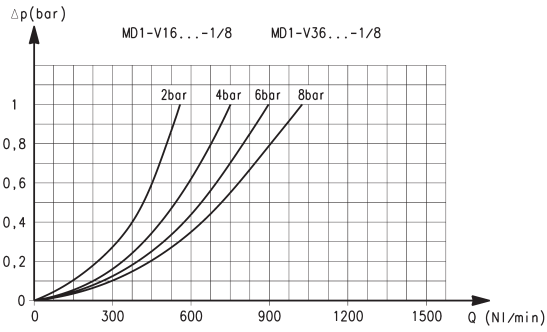

Ports with interchangeable G1/8 threaded cartridges


$\Delta p$  = Pressure drop  
Q = Flow

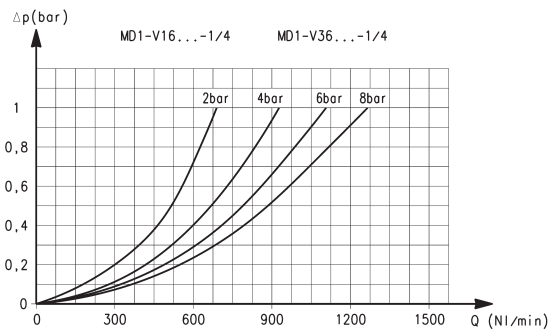

Ports with interchangeable G1/4 threaded cartridges

$\Delta p$  = Pressure drop  
Q = Flow

FLOW DIAGRAM for electro-pneumatically or pneumatically operated models

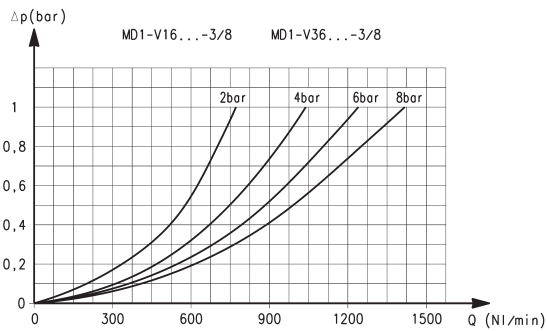

Ports with interchangeable G3/8 threaded cartridges

$\Delta p$  = Pressure drop  
Q = Flow