



Angle Needle Valve Panel Mounting, Tube x Tube, Imperial

Wade

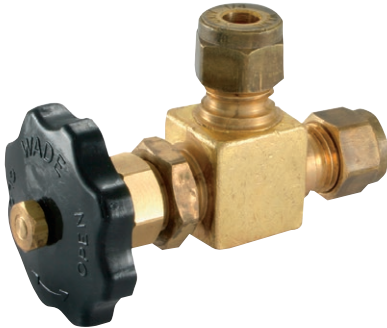

Features & Benefits

- 90° configuration
- Enables connection of two tubes of the same outside diameter
- A simple needle valve of brass construction (with the exception of the handle and nitrile O-rings)
- The design of the valve spindle enables control of the flow medium
- The design incorporates a simple locknut mechanism enabling the valve to be secured and locked in place through a control panel.
- Designed for low and medium pressure hydraulic and pneumatic applications
- Maximum working pressure:
Hydraulic applications: 3,000 psi / 200 bar
Pneumatic applications: 1,000 psi / 67 bar
- Working temperature range: -40°C to +135°C

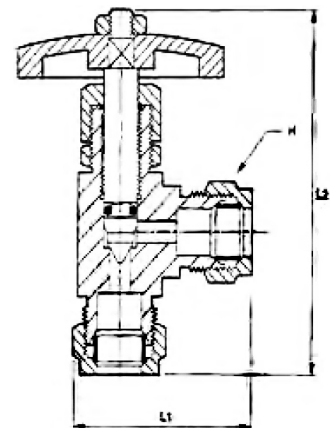

Part No	Spindle Type	Tube OD	L1 Length	L2 Length	H Hex A/F	Max Bulkhead	Bulkhead Hole Diameter
WADE-WVA3/B/16	Brass	1/4"	1.2"	2.75"	0.601"	3/16"	0.562"
WADE-WVA3/B/20	Brass	5/16"	1.2"	2.75"	0.601"	3/16"	0.562"