


Needle Valve, Foot Mounted, Tube x Hose, Imperial

Wade



Features & Benefits

- In-line configuration
- Enables connection of copper, nylon tube, etc, to 3/8" (10mm) inside diameter LPG rubber hose
- A simple needle valve of brass construction (with the exception of the handle and nitrile O-rings)
- The design of the valve spindle enables control of the flow medium
- The design incorporates a 'foot plate' with two countersunk holes allowing the valve to be mounted securely against a floor, wall or panel
- Designed for low pressure hydraulic and pneumatic applications
- Maximum working pressure: 100 psi / 6.8 bar
- Working temperature range: -40°C to +135°C

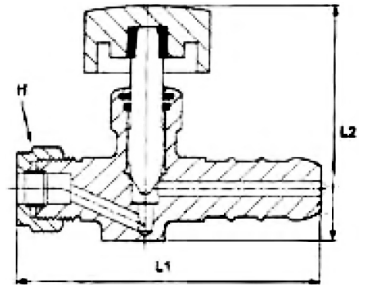

Part No	Tube OD	Tube OD	L1 length	L2 Length	H Hex A/F
WADE-WVA/B/16/F1	1/4"	1/4"	2.468"	1.562"	0.601"