

Oil Extractors



JWL Oil extractors are ideal for changing oil on tractors, cars, boats, motorcycles, garden machinery and other types of engines.

Service life is top-notch, and JWL Oil extractors are continuously reliable and easily operated - day after day.

The oil flow is infinitely adjustable and easily regulated with the trigger.

JWL Oil extractors are also suitable for the removing of various types of oils, e.g. hydraulic, cutting and engine oils.


JWL Oil extractors are made of impact-resistant materials and are extremely corrosion resistant.



147150-134



147160-134

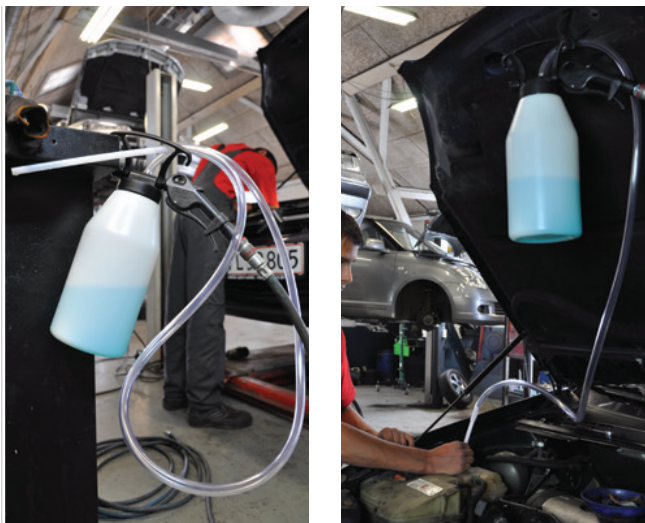

Technical description:

Working pressure	6-12 bar (87 -174 psi)
Air consumption	Max. 180 L. air/min at 8 bar
Containers	1,2 Litre, 2,0 Litre & 7,0 Litre
Vacuum	min. 60%
Thread	BSP/NPT

Materials:

Lid	POM
Suction hose	PVC
Suction pipe	PA11
Container	PE
Handle and trigger	POM
Gaskets/O-rings	Nitrile rubber
Valve	POM
Springs	Spring wire