


2 Way Valves

2/2 Valves for hot water and steam Pilot Operated

BRASS

PIPE MOUNTING

NORMALLY CLOSED



Port size	Orifice Ø	Flow factors			Seat Seal	Atex Zone	Operating Pressure Differential		Fluid Temp.		Power	Voltage	Solenoid Valve Order Number
		Kv l/min	KV m³/h	Qn l/min			Min bar	Max bar	Min °C	Max °C			
3/8"	10	22	1.32	-	PTFE	-	0.5	16	-30	160	9	230V/50-60Hz	550104DIS ₁
	16	78	4.70				0.5	10	-30	180	14	230V/50-60Hz	550077DIS ₂
1/2"	10	24	1.44				0.5	16	-30	160	9	230V/50-60Hz	550101DIS ₁
	16	78	4.70				0.5	10	-30	180	14	230V/50-60Hz	550072DIS ₂
3/4"	18	37	2.22				0.5	14	-30	160	9	230V/50-60Hz	550102DIS ₁
	27	193	11.60				0.5	10	-30	180	14	230V/50-60Hz	550074DIS ₂
1"	18	42	2.52				0.5	10	-30	180	16	24 Vdc	550073DIS ₂
	27	193	11.60				0.5	14	-30	160	9	230V/50-60Hz	550103DIS ₁
							0.5	10	-30	180	14	230V/50-60Hz	550076DIS ₂
							0.5	10	-30	180	16	24 Vdc	550075DIS ₂



Notes:

- 1. Drawing number 1
- 2. Drawing number 2

Fast Delivery

N° 1

A	B	C	D
G	mm	mm	mm
3/8"	48	85	40
1/2"	48	85	40
3/4"	48	85	40
1"	60	93.5	51

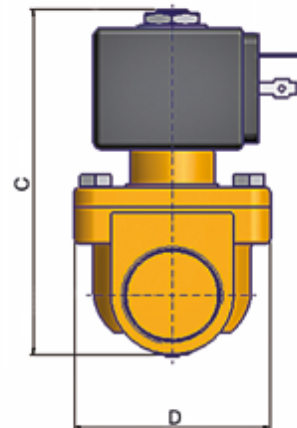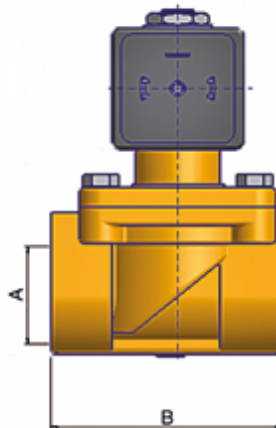

N° 2

A	B	C
G	mm	mm
3/8"	67	127
1/2"	67	127
3/4"	98.5	177
1"	98.5	177

