

In-line Contamination Monitor GRM 302 Mobile Filtration Unit



GRM 302 30 L

Single phase 110V, 240V or 3 phase 415V

Supplied fitted with appropriate plug and full user instructions.

Height 860 mm x **Width** - overall 500 mm x **Depth** 560 mm

Weight 50 kg.

SPECIFICATION standard


- Electric control box

Indicators

- Delivery line - visual indicator with combined electric cut-out switch
- Nitrile seals
- Flexible hoses – 2 metres long, suction & outlet
- Heavy duty trolley & wheels
- **Inlet (pump protection) filtration** – micron metal mesh
- **Delivery filtration “Spin-on” type** – See Options below
- Inline contamination monitor (ICM) fitted



Spare Parts

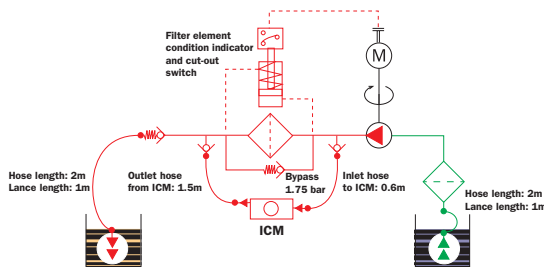

Filter element - Standard length

Inorganic microfibre element

CS 100 A01 A P01	1	µm absolute
CS 100 A03 A P01	3	µm absolute
CS 100 A06 A P01	6	µm absolute
CS 100 A10 A P01	10	µm absolute
CS 100 A25 A P01	25	µm absolute
Wire mesh element		
CS 100 M25 A P01	25	µm
CS 100 M60 A P01	60	µm

Filter element - Extended length

Inorganic microfibre element

CS 150 A01 A P01	1	µm absolute
CS 150 A03 A P01	3	µm absolute
CS 150 A06 A P01	6	µm absolute
CS 150 A10 A P01	10	µm absolute
CS 150 A25 A P01	25	µm absolute
Wire mesh element		
CS 150 M25 A P01	25	µm
CS 150 M60 A P01	60	µm

GRM302 OUTLET FILTRATION OPTIONS

Outlet filtration micron options available:

CS150 A SERIES

3, 6, 10 and 25 micron absolute. Effective area - 5390 cm²

CS150 P SERIES

10 and 25 micron nominal. Effective area - 5760 cm²

GRM302 - Water removal options available:

CW150 P SERIES

10 & 25 micron nominal removing 0.79 litres of water while filtering oil at 10 or 25 micron nominal filtration

Please note: filtration is not included and should be ordered separately

Ordering information

GRM302	Example: GRM	1	2	3	4	5
		30	2	1	M149	S
1 - Flow	2 - Electrical power	3 - Electric motor	4 - Replacement suction element			
30 30L/min	2 0.75kW	1 110V single phase	M149 173µm cleanable element			
5 - Filtration		2 240V single phase				
S No filter fitted, to be ordered separately - see spare parts		3 415V 4 phase				

Other version of this unit are available, please contact your local sales office for information.



www.hoses.co.uk

www.hoses.co.uk