



# Anti-vibration Mounts

## Male Buffers

These mounts are designed to prevent shocks and overloading thanks to their progressive absorption. This range can accommodate weights from 2kg up to 1,400kg.

- Natural rubber, zinc plated in accordance with CE standards, chrome VI free, white
- Stiffness tolerance: +/- 20%

**Applications:** engines, tooling machinery, pumps, special equipment, HVAC and genset.

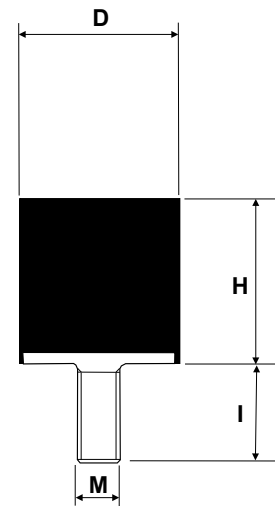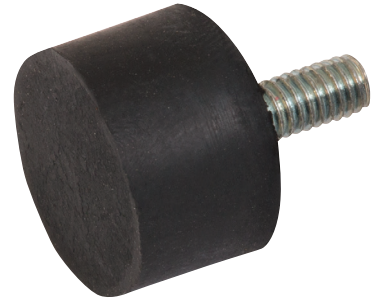

MALE BUFFER						
PART CODE	DIAMETER (D) mm	HEIGHT (H) mm	THREAD (M) mm	Compression Stiffness Rate Kg/mm	Max Static Deflection mm	Max. Operating Load Kg
MCB-100810	10	8	M4 x 10	3.7	1.6	5.9
MCB-161010	16	10	M4 x 10	8.4	2	16.7
MCB-201218	20	12	M6 x 18	19.3	2.4	46.3
MCB-251518	25	15	M6 x 18	26.9	3	80.8
MCB-302020	30	20	M8 x 20	22	4	88.1
MCB-403023	40	30	M8 x 23	12	6	72.2
MCB-503025	50	30	M10 x 25	47.1	6	282.7
MCB-755037	75	50	M12 x 37	57.3	10	573.1