

Flat Spray Nozzle, Straight, without Monitoring




APPLICATION

The nozzle is made for spraying of lubricant on sliding surfaces.

PRODUCT CHARACTERISTICS

- Heating
- Media: for grease and oil
- separate monitoring of air and grease

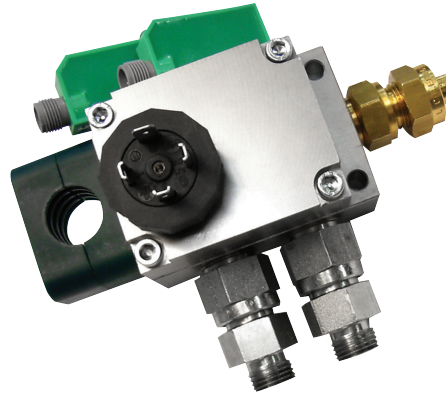

Nozzle with heating and monitoring

DESIGN

... with heating

The design of the nozzle body is as mentioned before.

There is an additional thermodynamic heating mounted on the side of the housing. The heating performance is 200 Watt.

A thermostat controls the temperature $70 \pm 5^\circ\text{C}$.

... without monitoring

The spray nozzle is a mixing block in which grease or oil together with air are blown out through a nozzle. Lubricant and compressed-air are fed by tubes with 10 mm diameter. A non-return valve serves as the supply with an opening pressure of 1 bar. Different types of nozzles are available.

... with monitoring

The design is similar to the nozzle without monitoring.

For monitoring there is an additional piston in the duct for the lubricant or airstream integrated. A motion indicator activates the monitoring switch.

PRINCIPLE OF OPERATION

According to the viscosity of the lubricant the nozzle is usable without heating. In case of high-viscosity oils or low temperatures a heating is necessary.

The nozzle in combination with the heating is able to spray oils at a surrounding temperature of 20°C with viscosities up to $200.000 \text{ mm}^2/\text{s}$ at $+ 20^\circ\text{C}$.

A. NOZZLES TYPE

Code

SDU

B. NOZZLES INSERTS

Code

Flat spray nozzle straight

01

Round spray nozzle straight


02

Flat spray nozzle 90°


03

Round spray nozzle 90°


04

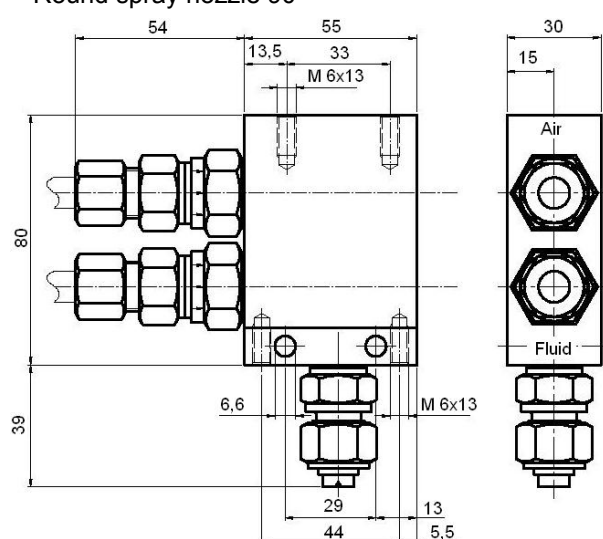


Flat spray nozzle straight

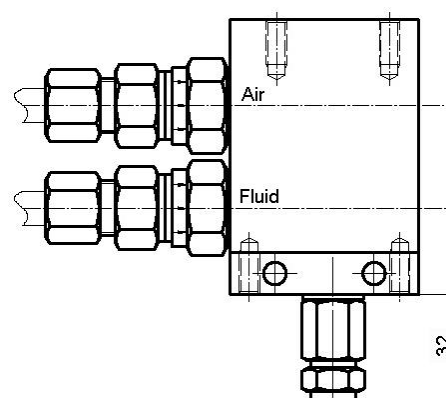

Round spray nozzle straight

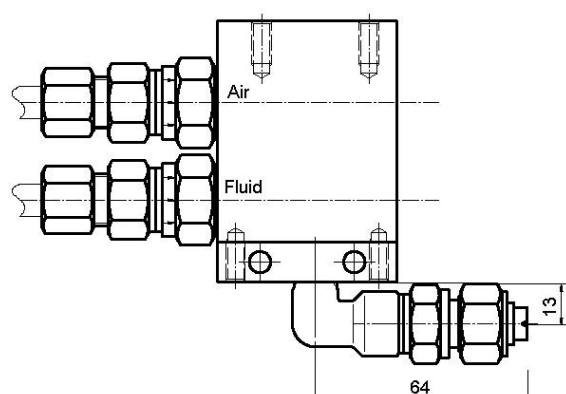

Flat spray nozzle 90° *)

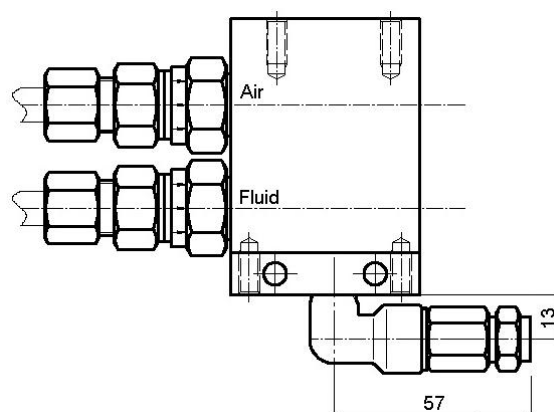

Round spray nozzle 90° *)

*) Delivery conditions ex works are as shown in the pictures above. The spraying direction is adjustable within an angle of 360° if required. After changing of the spraying direction you have to fix the nozzle again by gluing with the housing.

C. REVISION

Code


Status A

A

D. MONITORING

Code

without	00
Grease	01
Compressed air	02
Grease and compressed air	03

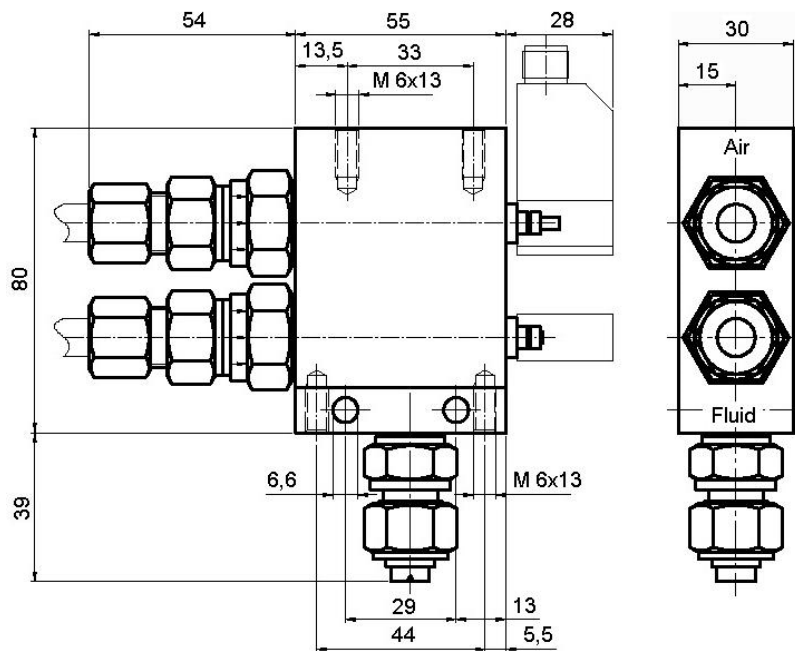


Nozzle with monitoring

E. HEATING

Code

without	O
with	H

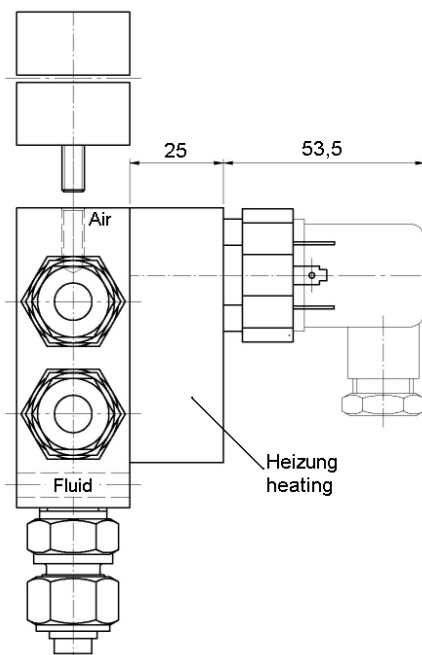

F. ACCESSORIES

	Code
without	00
Fastening clamp (Ø 6 - 20 mm possible)	01

TECHNICAL DATA

Air consumption : nozzle- and pressure dependent
 Grease : up to NLGI class 3
 Oil : up to 200.000 mm²/s at 20°
 Heating : 200 watt, 115/230 V AC
 Thermostate : 70 ±5°C
 Protection class : IP 65
 Sealings : FPM
 Material for housing : Aluminium seawater resistant
 Monitoring switch : technical data see data sheet 66925 P1_GB

Maintenance:

Disassembling and cleaning with petroleum.

EXAMPLE OF ORDER

		Code					
		S	D	U	0	2	A
Nozzle type	SDU	Code: SDU					
Nozzle inserts							
Round spray nozzle straight		Code: 02					
Revision							
Status A		Code: A					
Monitoring							
Compressed air		Code: 03					
Heating							
without		Code: O					
Accessories							
Fastening clamp		Code: 01					