
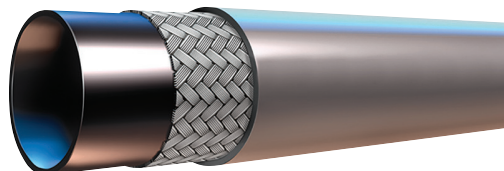
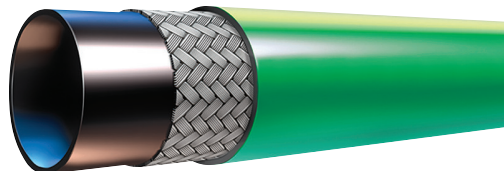
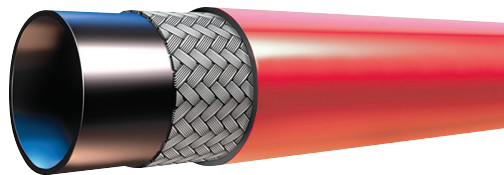


# Push-Lok Hose

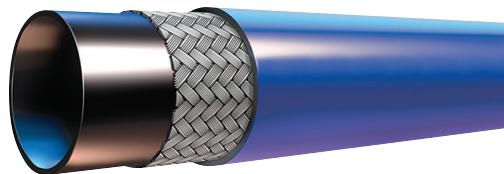

# Low Pressure Push-Lok®

The self-grip hose system for low-pressure applications

Parker's Push-Lok hose line features the widest fluid compatibility, application and size range in the industry. The Push-Lok system is easy to use. No clamps or special tools are required during installation. And with Parker's exclusive color-code system, you can inventory, maintain and identify your hose needs easily and efficiently.

The industry's most complete line of low-pressure hose and fittings, Push-Lok offers the range and versatility to meet all your instrumentation needs.

## One fitting series for all hose types with a wide range of end-configurations

DIN, BSP, SAE, JIC and ORFS connections in

- brass
- steel
- stainless steel



## Wide range of hose types

### 6 x rubber

- 801PLUS** for a variety of applications
- 804** for high-temperature water/phosphate ester fluids
- 821FR** with fire-retardant hose cover
- 836, 846** for high oil temperatures
- 837BM** for a variety of applications including automotive

### 2 x thermoplastic

- 830M** for a variety of applications including automotive
- 838M** for non-conductive applications

### 1 x hybrid

- 837PU-PLUS** for a variety of high demanding applications including automotive

## Wide range of applications



## The outstanding properties

- Easy assembly and organisation with Parker's exclusive color-code system
- Push-Lok assemblies can be made in seconds, saving valuable time and cost
- The unique seal of Push-Lok ensures reliable, durable, leak-free service
- High functional safety with a design factor of 4
- Wide range of hose and fittings for a wide range of applications

## Exclusive color-code system

### 6 different colours


In applications where a number of hose lines carry different media, Push-Lok colors reduce timely "tracing" of lines, preventing disconnection of wrong line and unnecessary, downtime.

#### ***Using color-coded Push-Lok hose is an excellent way to:***

- Enhance product appearance
- Improve inventory control
- Identify industrial drop lines
- Easy control of maintenance intervals
- Simple stock planning in different departments



## Hose construction and hose-fitting connection

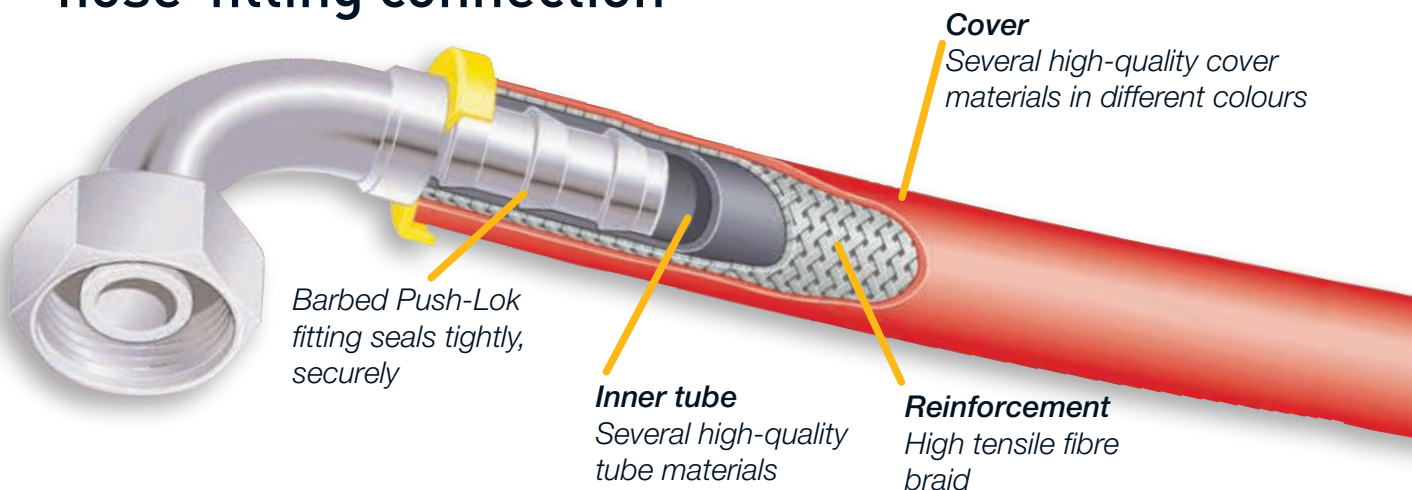

## 801PLUS

### Push-Lok PLUS

For a variety of applications

**IMPROVED!**

#### Primary Applications

All Markets: For low pressure applications  
Paper and Pulp: For water / air applications

#### Restrictions

Not permitted for use in air brake systems.  
Not suitable for high dynamic pulsation systems.  
Not suitable for dry air.  
Not recommended for fuels (petrol, diesel etc.).

#### Construction

Tube: Nitrile (NBR)  
Reinforcement: High-tensile fibre braid  
Cover: High performance synthetic rubber  
in different colours

#### Temperature Range ..... -40 °C up to +100 °C

Exception: Air ..... max. +70 °C  
Water ..... max. +85 °C

- Global availability and performance
- Very flexible
- Wide range of colours
- Available up to size -16
- Nitrile (NBR) inner tube  
– extended fluid compatibility
- Improved oil compatibility

#### Recommended Fluids

Air, water, water-oil emulsions, water-glycol and mineral based hydraulic respectively lubricating oils.  
Consult the chemical compatibility section in catalogue C4400/UK, pages **Ab-26** to **Ab-34** for more detailed information.

#### Fitting Series



Part Number	Hose I.D.				Hose O.D.	Pressure Rating				Vacuum*	min. bend radius	weight
	DN	Inch	Size	mm	mm	max. working pressure	min. burst pressure					
						MPa	psi	MPa	psi	kPa	mm	kg
801PLUS-4-XXX-RL	6	1/4	-4	6.4	12.7	2.4	350	9.7	1400	95	65	0.13
801PLUS-6-XXX-RL	10	3/8	-6	9.5	15.9	2.4	350	9.7	1400	95	75	0.16
801PLUS-8-XXX-RL	12	1/2	-8	12.7	19.8	2.1	300	8.4	1200	95	125	0.27
801PLUS-10-XXX-RL	16	5/8	-10	15.9	23.0	2.1	300	8.4	1200	51	150	0.28
801PLUS-12-XXX-RL	19	3/4	-12	19.1	26.2	2.1	300	8.4	1200	51	180	0.36
801PLUS-16-XXX-RL	25	1	-16	25.4	32.5	1.4	200	5.6	800	51	250	0.55

\* the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa

Note: when ordering, specify Push-Lok hose part number, followed by size, followed by colour. Example: 801PLUS-4-XXX-RL

XXX = BLK = black  
BLU = blue  
RED = red  
GRN = green  
GRA = grey  
YEL = yellow



\*For 801PLUS in yellow only, please consider the following part-number without PLUS  
Example: 801PLUS-4-YEL-RL (yellow)



## Low Pressure

### Push-Lok – Multipurpose

## Push-Lok Hose

### 837BM

# 837BM

## Push-Lok

For a variety of applications including automotive

### Primary Applications

All Markets: For a variety of applications  
Automotive: For water / air applications

### Restrictions

Not permitted for use in air brake systems  
Not suitable for high dynamic pulsation systems  
Not recommended for fuels (petrol, diesel etc.)  
Not recommended for mineral based hydraulic and lubricating oils

### Construction

Tube: Synthetic rubber  
Reinforcement: High-tensile fibre braid  
Cover: High performance synthetic rubber in different colours

Temperature Range ..... -40 °C up to +100 °C

Exception: Air ..... max. +70 °C  
Water ..... max. +85 °C

- High level of hose flexibility
- High abrasion resistance
- Free from wetting disturbing substances (LABS free)
- Low push-in forces










### Recommended Fluids

Air, dry air, water, water-oil-emulsions and water-glycol-emulsions.

Consult the chemical compatibility section in catalogue C4400/UK, pages **Ab-26** to **Ab-34** for more detailed information.

### Fitting Series



Part Number	 Hose I.D.				 Hose O.D.	Pressure Rating				Vacuum* 	 min. bend radius	 weight
	DN	Inch	Size	mm	max. working pressure 		min. burst pressure 					
					MPa	psi	MPa	psi				
837BM-4-XXX-RL	6	1/4	-4	6.4	12.7	1.6	235	6.4	940	95	65	0.13
837BM-6-XXX-RL	10	3/8	-6	9.5	15.9	1.6	235	6.4	940	95	75	0.16
837BM-8-XXX-RL	12	1/2	-8	12.7	19.8	1.6	235	6.4	940	95	130	0.27
837BM-10-XXX-RL	16	5/8	-10	15.9	23.0	1.6	235	6.4	940	51	150	0.28
837BM-12-XXX-RL	19	3/4	-12	19.1	26.2	1.6	235	6.4	940	51	180	0.36
837BM-16-XXX-RL	25	1	-16	25.4	32.5	1.6	235	6.4	940	51	250	0.55

\* the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa

Note: when ordering, specify Push-Lok hose part number, followed by size, followed by colour. Example: 837BM-4-XXX-RL

XXX = BLK = black

BLU = blue

RED = red

GRN = green

GRA = grey

Example: 837BM-4-GRN-RL (green)

RL = only available on reels



## Low Pressure

### Push-Lok – Multipurpose

## Push-Lok Hose

### 837PU-Plus

## 837PU-Plus

### Hybrid Push-Lok

For a variety of high demanding applications

#### Primary Applications

All Markets: For high demand applications  
For energy chain systems

Robot and Automotive market:  
For hose bundle systems

#### Restrictions

Not permitted for use in air brake systems  
Not suitable for high dynamic pulsation systems  
Not recommended for fuels (petrol, diesel etc.)  
Not recommended for mineral based hydraulic and lubricating oils

#### Construction

Tube: Synthetic rubber  
Reinforcement: High-tensile fibre braid  
Cover: High performance polyurethane material in different colours

Temperature Range ..... -40 °C up to +100 °C

Exception: Air ..... max. +70 °C  
Water ..... max. +85 °C



- High level of hose flexibility
- High abrasion resistance
- High torsion resistance
- Free from wetting disturbing substances (LABS free)
- Low push-in forces

#### Recommended Fluids

Air, dry air, water, water-oil-emulsions and water-glycol-emulsions.

Consult the chemical compatibility section in catalogue C4400/UK, pages **Ab-26** to **Ab-34** for more detailed information.

#### Fitting Series



Part Number	Hose I.D.				Hose O.D. mm	Pressure Rating				Vacuum*	min. bend radius mm	weight kg
	DN	Inch	Size	mm		max. working pressure MPa	max. working pressure psi	min. burst pressure MPa	min. burst pressure psi			
837PU-4-XXX-RL	6	1/4	-4	6.4	12.7	1.6	235	6.4	940	95	30	0.11
837PU-6-XXX-RL	10	3/8	-6	9.5	15.9	1.6	235	6.4	940	95	50	0.15
837PU-8-XXX-RL	12	1/2	-8	12.7	19.8	1.6	235	6.4	940	95	70	0.26
837PU-10-XXX-RL	16	5/8	-10	15.9	23.0	1.6	235	6.4	940	51	90	0.27
837PU-12-XXX-RL	19	3/4	-12	19.1	26.2	1.6	235	6.4	940	51	110	0.33
837PU-16-XXX-RL	25	1	-16	25.4	32.5	1.6	235	6.4	940	51	180	0.52

\* the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa

Note: when ordering, specify Push-Lok hose part number, followed by size, followed by colour. Example: 837PU-4-XXX-RL

XXX = BLK = black  
BLU = blue  
RED = red  
GRN = green  
GRA = grey



Example: 837PU-4-GRN-RL (green)

RL = only available on reels