

PICO-L Ø50/63/76

Clamps

PICO-L coupling is used for connection of details with straight edges. PICO-L is a strong pipe coupling in stainless steel. With SBR rubber and conductivity strip in stainless steel. Two zinc plated bolts.


Length: 100 mm.

Specification of Standard Coupling

- Outside skin in stainless steel 430
- Black SBR gasket $-30^{\circ}\text{C}/+80^{\circ}\text{C}$
- Zinc plated bolts
- Stainless steel 304L, conductivity strip

Options

- All stainless steel 304L version
- White Nitrile NBR gasket FDA $-30^{\circ}\text{C}/+110^{\circ}\text{C}$
- Silicone VMQ gasket $-65^{\circ}\text{C}/+225^{\circ}\text{C}$
- Viton FPM gasket $-20^{\circ}\text{C}/+250^{\circ}\text{C}$
- Coupling with clamp and side bars
- Coupling for two tubes with different diameters
- Conductivity strip in copper CU A1
- Conductive protecting ring in stainless steel 304L

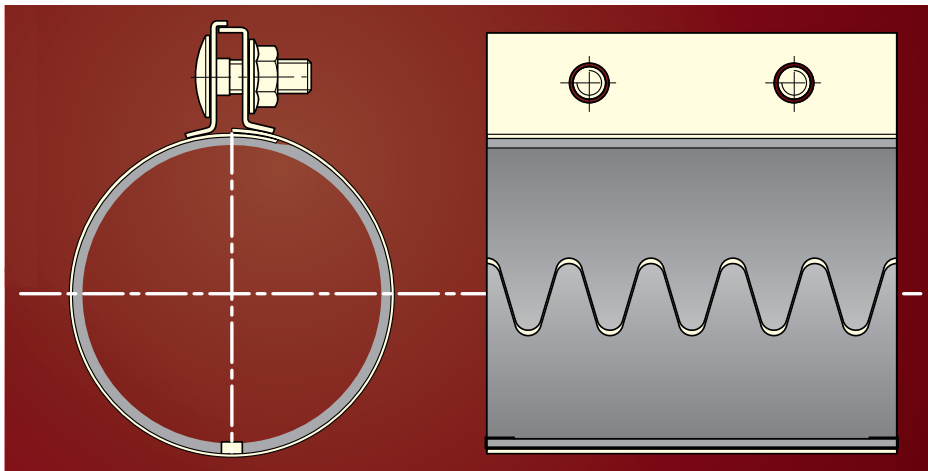


L	100 mm
Ø	38.1 <> 114.3 mm
Boulons Bolts	M8
Serrage Tightening	16 N.m

Maximum Pressure Curves For Eurac L100

Pression maximum de service tuyauterie libre
Maximum working pressure with free-hanging pipes



Pression maximum de service tuyauterie bloquée
Maximum working pressure with clamped pipes

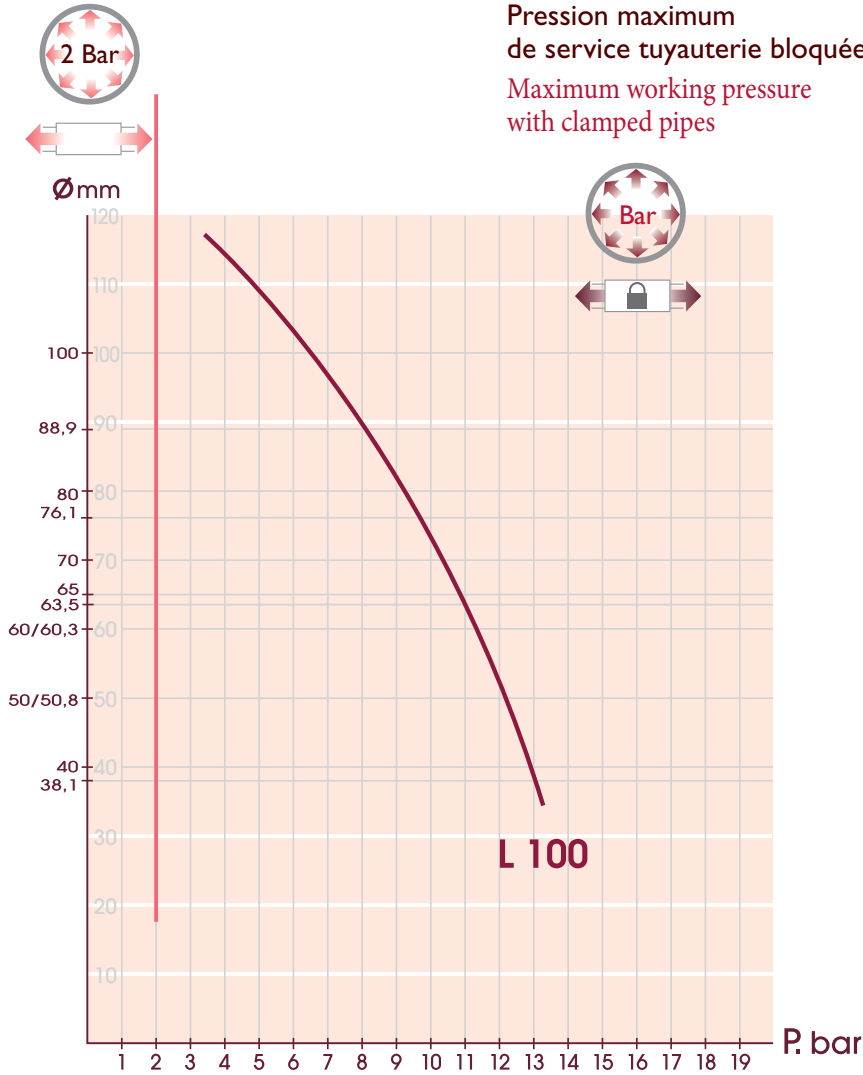

Ø	L100
38,1	
40	
45	
50/50,8	
54	
55	
60/60,3	
63,5	
65	
70	
75	
76,1	
80	
82	
84	
85	
88,90	
95	
100	
101,6	
104	
105	
108	
114,3	