


# Wall or Ceiling Mounted Pipe Clips



## Product Data Sheet (2017-10-13)

### BSI Clips

BSI clips are rubber lined universal clips for mounting pipes to the wall or ceiling.

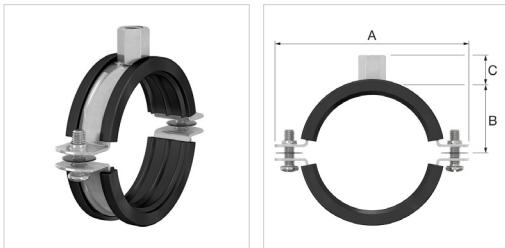

Type	Ø Pipe		Connection	Strip dimensions [mm]	Max. working load [N]	Dimensions			###	Order Code
	Ext. dia. [mm]	Nom. ["]				A [mm]	B [mm]	C [mm]		
BSI M 8/10 x 8 - 10	8 - 10	1/8	M 8/10	20 x 1.5	1000	53	13	16	50	39023
BSI M 8/10 x 12 - 14	12 - 14	1/4	M 8/10	20 x 1.5	1000	58	15	16	50	39000
BSI M 8/10 x 15 - 19	15 - 19	3/8	M 8/10	20 x 1.5	1000	62	18	16	50	39001
BSI M 8/10 x 20 - 25	20 - 25	1/2	M 8/10	20 x 1.5	1000	69	21	16	50	39002
BSI M 8/10 x 26 - 30	26 - 30	3/4	M 8/10	20 x 1.5	1000	74	23	16	50	39003
BSI M 8/10 x 32 - 36	32 - 36	1	M 8/10	20 x 1.5	1000	81	26	16	50	39004
BSI M 8/10 x 38 - 43	38 - 43	1 1/4	M 8/10	20 x 1.5	1000	87	30	16	50	39005
BSI M 8/10 x 44 - 49	44 - 49	1 1/2	M 8/10	20 x 1.5	1000	94	33	16	50	39006
BSI M 8/10 x 50 - 55	50 - 55		M 8/10	20 x 1.5	1000	103	36	16	50	39007
BSI M 8/10 x 56 - 61	56 - 61	2	M 8/10	20 x 1.5	1000	106	39	16	50	39008
BSI M 8/10 x 62 - 67	62 - 67		M 8/10	20 x 2.0	1300	113	42	16	50	39009
BSI M 8/10 x 68 - 73	68 - 73		M 8/10	20 x 2.0	1300	123	45	16	50	39010
BSI M 8/10 x 75 - 80	75 - 80	2 1/2	M 8/10	20 x 2.0	1300	128	48	16	50	39011
BSI M 8/10 x 82 - 86	82 - 86		M 8/10	20 x 2.0	1300	134	51	16	50	39012
BSI M 8/10 x 87 - 92	87 - 92	3	M 8/10	20 x 2.0	1300	141	54	16	50	39013
BSI M 8/10 x 95 - 102	95 - 102	3 1/2	M 8/10	20 x 2.5	2150	158	58	16	50	39014

Type	Ø Pipe		Connection	Strip dimensions [mm]	Max. working load [N]	Dimensions			###	Order Code
	Ext. dia. [mm]	Nom. ["]				A [mm]	B [mm]	C [mm]		
<b>BSI M 8/10 x 108 - 116</b>	108 - 116	4	M 8/10	20 x 2.5	2150	170	65	16	25	39015
<b>BSI M 10/12 x 108 - 116</b>	108 - 116	4	M 10/12	20 x 2.5	2150	170	65	18	25	39035
<b>BSI M 8/10 x 121 - 127</b>	121 - 127		M 8/10	20 x 2.5	2150	185	70	16	25	39016
<b>BSI M 8/10 x 131 - 141</b>	131 - 141	5	M 8/10	20 x 2.5	2150	195	77	16	25	39017
<b>BSI M 10/12 x 131 - 141</b>	131 - 141	5	M 10/12	20 x 2.5	2150	195	77	18	25	39037
<b>BSI M 8/10 x 159 - 163</b>	159 - 163		M 8/10	20 x 2.5	2150	215	88	16	25	39018
<b>BSI M 10/12 x 159 - 163</b>	159 - 163		M 10/12	20 x 2.5	2150	215	88	18	25	39038
<b>BSI M 8/10 x 165 - 169</b>	165 - 169	6	M 8/10	20 x 2.5	2150	226	91	16	25	39019
<b>BSI M 10/12 x 165 - 169</b>	165 - 169	6	M 10/12	20 x 2.5	2150	226	91	18	25	39039
<b>BSI M 8/10 x 192 - 202</b>	192 - 202		M 8/10	20 x 3.0	3000	265	107	16	25	39020
<b>BSI M 8/10 x 210 - 220</b>	210 - 220	8	M 8/10	20 x 3.0	3000	274	117	16	25	39022
<b>BSI M 10/12 x 210 - 220</b>	210 - 220	8	M 10/12	20 x 3.0	3000	274	117	18	25	39034



### Advantages

- Fitted with two bolts with anti-loss ring.
- Bolt with slot and cross head.
- Reinforcement grooves ensure that BSI clips maintain their shape.

### Technical information

- Noise suppressing rubber lining (EPDM): 17 dB(A) according to ISO 3822-1. To achieve maximum sound suppression do not overload the fitting.
- Safety margin for minimal breaking load (V) = 3.
- Clip: Electrolytically zinc plated.
- Suitable for temperatures -40 °C to +120 °C.
- BSI clips are compatible with pipe sizes according to DIN 2448 and DIN EN 1057.