


Fibreglass Swingback Step Ladder

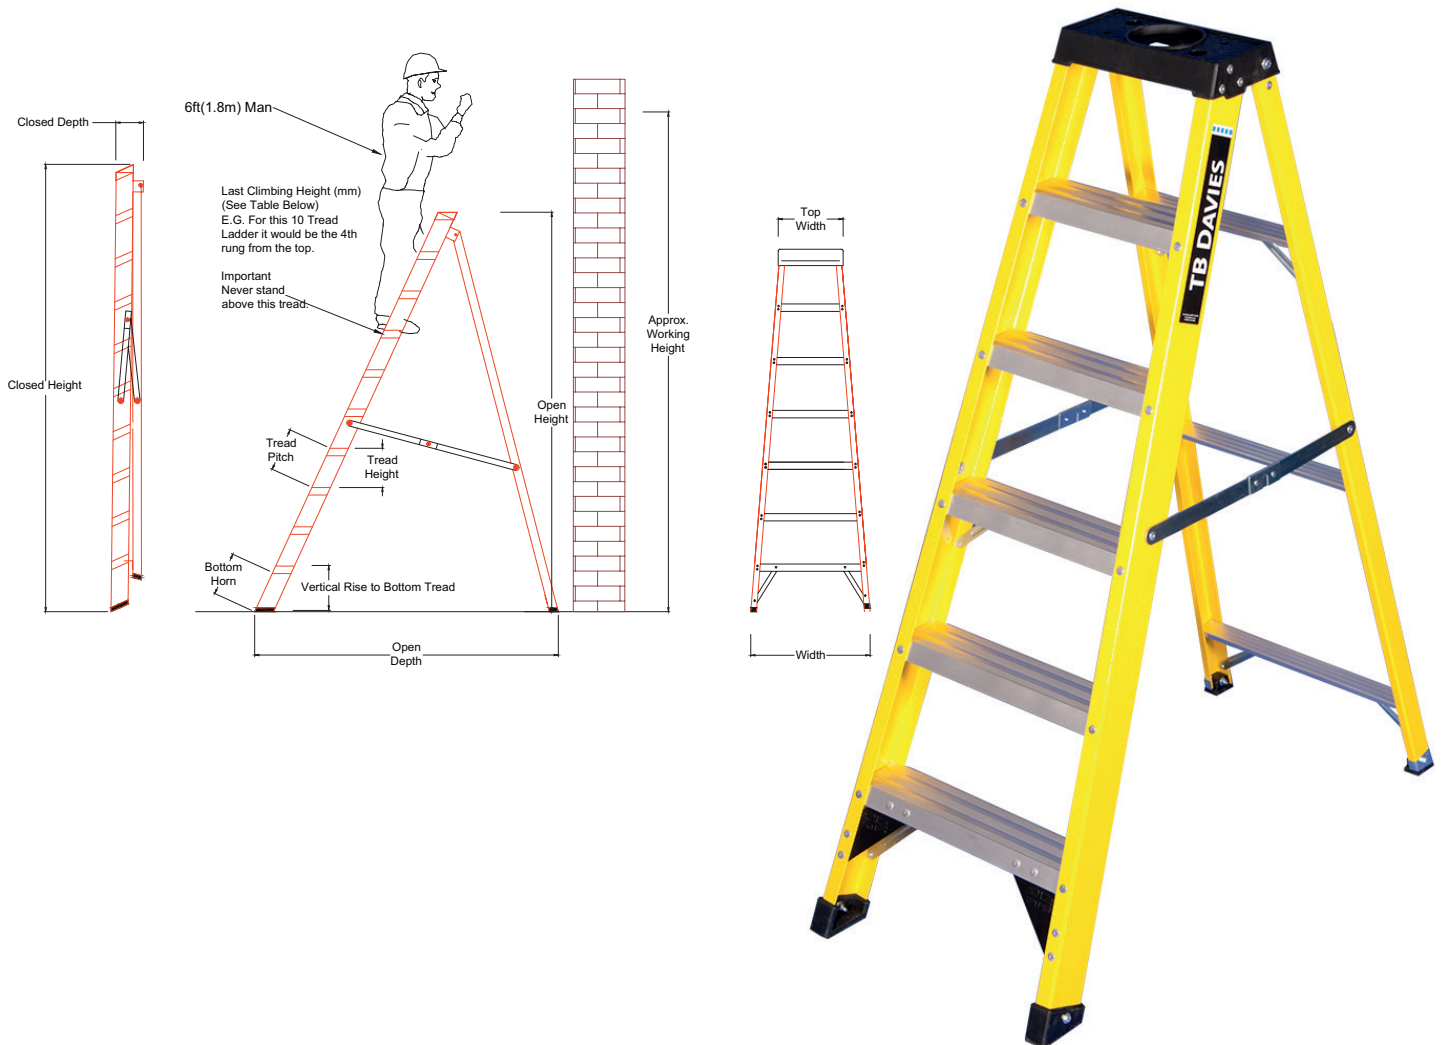

Product Dimensions

PRODUCT SKU	TREAD COUNT	APPROX. WORKING HEIGHT* (M)	LAST CLIMBING HEIGHT (M)	OPEN HEIGHT (M)	CLOSED HEIGHT (M)	WIDTH (M)	OPEN DEPTH (M)	WEIGHT (NETT KG)
1235-004	4	1.8	0.2	1.0	1.1	0.4	0.8	6.0
1235-005	5	2.1	0.5	1.2	1.3	0.5	0.9	7.0
1235-006	6	2.3	0.7	1.4	1.6	0.5	1.1	8.0
1235-008	8	2.8	1.2	1.9	2.1	0.6	1.4	10.0
1235-010	10	3.2	1.6	2.4	2.6	0.6	1.7	12.0

- * Working height is calculated as 1,600mm plus the height of the platform or last climbing tread, whichever is appropriate.
- Tread count includes top cap tread.

Technical Description

Our fibreglass stepladder range incorporates a multi-functional tool tray with non-conductive stiles, making them ideal for working around electricity. The combination of super-strong C-section fibreglass stiles and reinforced aluminium treads gives you a durable yet lightweight and easy to handle step that is perfect for the busy tradesman.

- » Non-conductive stiles insulated to 30,000 volts (EN61478), ideal for working around electricity
- » Integrated multi-function tool tray
- » Comfortable 80mm treads
- » Hinged metal locking stays provide optimal stability
- » Large feet angled to maximise ground contact and reduce slip

Standards & Classification

- » Max Load 150kg
- » EN131

Warranty

- » 3 Years

Commodity Code

- » 70199000

Shipping Dimensions

PRODUCT SKU	SHIPPING LENGTH (MM)	SHIPPING WIDTH (MM)	SHIPPING DEPTH (MM)	SHIPPING VOLUME (M ³)	SHIPPING WEIGHT (GROSS KG)	BARCODE
1235-004	1,080	446	165	0.0795	6.0	5060169480292
1235-005	1,330	478	165	0.1049	7.0	5060169480308
1235-006	1,580	510	165	0.1330	8.0	5060169480315
1235-008	2,080	574	165	0.1970	10.0	5060169480339
1235-010	2,580	638	165	0.2716	12.0	5060169480704